


THANK YOU FOR SELECTING A HUSKY FLOOR LINER FROM WINFIELD CONSUMER PRODUCTS

CARE AND USE INSTRUCTIONS

Your new liner is custom molded to fit your vehicle. Upon removal from the box your liner will not completely unroll and lay flat. This is normal and only temporary. Just place the liner on the floor or in the back of your vehicle with a weight in each corner (a book works well). After about 15 minutes, your liner will remain flat. In colder climates this “relaxing” may take longer; moving the liner to a heated area will accelerate the process.

Your liner is manufactured using an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liner is with a damp cloth or sponge. If using a cleaner, 409[®] or Glass Plus[®] work well. Use of Armor All[®], Son-of-a-Gun[®] or similar items is discouraged as these products make the liner slick.

CARGO LINER INSTALLATION INSTRUCTIONS FOR YOUR TOYOTA 4RUNNER WITH THIRD SEAT OPTION

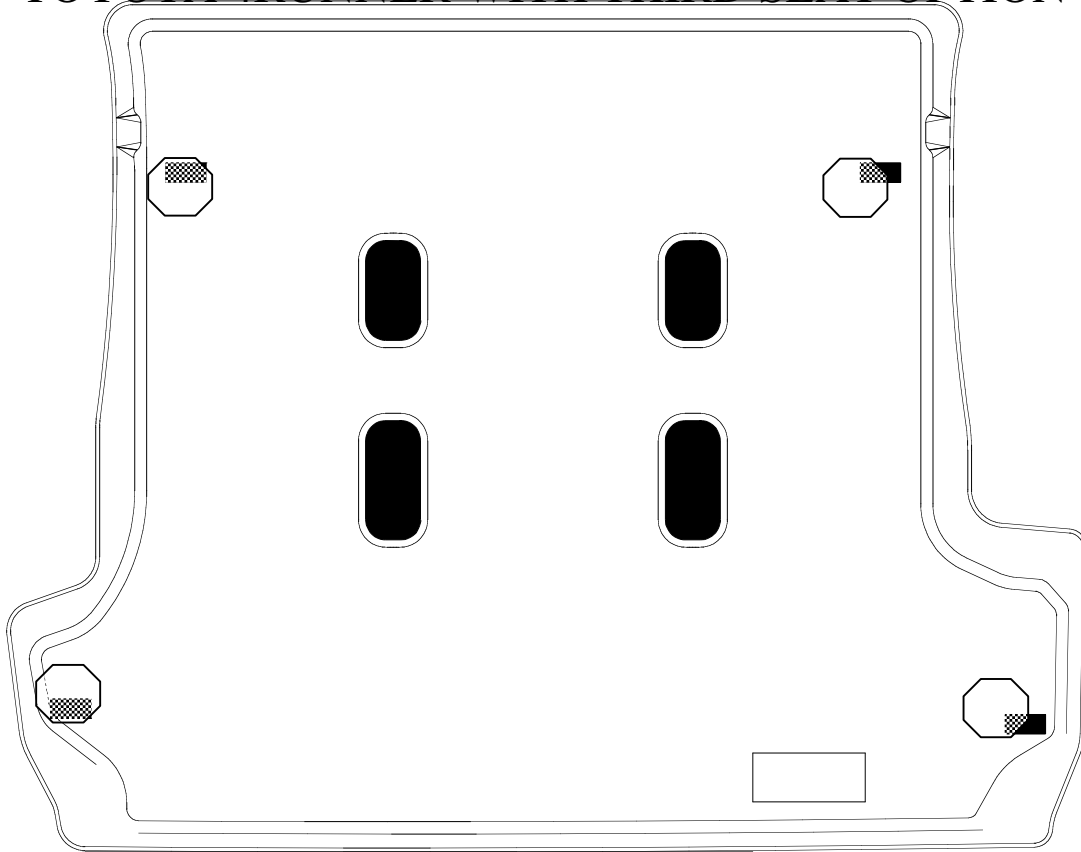

TO USE YOUR THIRD ROW FOLD DOWN SEATS WITH YOUR CARGO LINER IN PLACE, JUST TRIM AWAY THE MATERIAL FROM INSIDE OF THE FOUR (4) LARGE AREAS SHOWN ABOVE DARKENED. USE THE INSIDE EDGES OF THE PERIMETER RAISED BANDS AS A TRIMMING GUIDE. A PHOTO OF A TRIMMED PART IS SHOWN ON THE BACK OF THIS SHEET. **DO NOT USE THE THIRD SEATS WITHOUT FIRST TRIMMING YOUR CARGO LINER AS THE SEATS WILL NOT LOCK SECURELY INTO PLACE.**

IF YOU WISH TO ACCESS THE FACTORY CARGO HOOK TIE DOWN LOCATIONS IN YOUR 4RUNNER WITH YOUR CARGO LINER IN PLACE, MAKE A HORIZONTAL SLIT ACROSS THE CENTER OF THE RAISED AREAS OF THE (4) SMALL RECTANGULAR AREAS SHOWN ABOVE CIRCLED. A UTILITY KNIFE OR HEAVY SHEARS WORK WELL FOR TRIMMING.

PART #2571 SHOWN TRIMMED TO ALLOW
THIRD SEATS TO LOCK INTO PLACE

