

INSTALLATION INSTRUCTIONS FOR PART 99-9103





 Dash Disassembly Audi A4 - 2001-2007 	1
• Kit Assembly - DIN Head Unit Provision	2
• Final Assembly	3

TABLE OF CONTENTS



KNOWLEDGE IS POWER Enhance your installation and fabrication skills by

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



1

AUDI A4 2001-2007

- **1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- Insert Metra's 86-9001 into the slots in the factory head unit and pull the unit out.
 Figure A



DASH DISASSEMBLY

A

3 Disconnect the wiring.



DIN Head Unit Provision


- 1 Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down.
- 2 Slide the after-market head unit into the cage until secure.

KIT ASSEMBLY






FINAL ASSEMBLY



- Strip wire ends back 1/2"
- Twist ends together
- **Solder**
- Таре
- 1 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter and making the connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit) Figure A
- **2** Re-connect the negative battery terminal and test the unit for proper operation.
- **3** Snap radio housing assembly into factory radio opening.



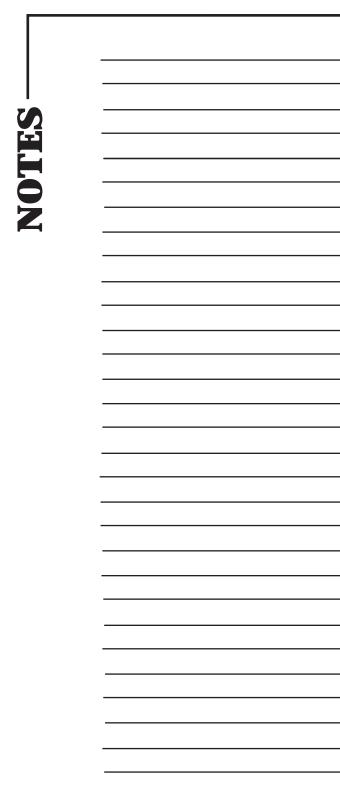





— I
I
<u> </u>
- Z
— <u>-</u>
— ()
-
—
=
_



