



MITSUBISHI DATA BUS INTERFACE

MITO-02

INSTALLATION INSTRUCTIONS

*** READ IMPORTANT WARNING ON PAGE 2
BEFORE ATTEMPTING ANY INSTALLATION**

The **MITO-02** is designed to be used in vehicles listed in the applications that have the Rockford Fosgate audio system. The Rockford Fosgate system uses a digital signal to turn on the amplifier. The MITO-02 supplies that digital signal to turn the amplifier on. When installing a radio that has navigation built in, the MITO-02 can supply VSS (Vehicle Speed Sense), Parking Brake, and Reverse; however Reverse is not available on manual transmission vehicles.

***If vehicle is equipped with Bluetooth,
that feature will be retained.***

APPLICATIONS

MITSUBISHI

Lancer 2008
Outlander 2007-2008

INTERFACE COMPONENTS

- MITO-02 Interface
- 14 Pin Harness with RCA's
- Vehicle side harness



1-800-221-0932



www.axxessinterface.com

©Copyright 2009 Metra Electronics Corporation

TOOLS REQUIRED FOR INSTALLATION

• Cutting Tool • Small Blade Screwdriver • Tape • Crimping Tool • Connectors (I.E. butt-connectors, bell caps, etc...)

*** IMPORTANT WARNING**

THIS PRODUCT INCLUDES INSTRUCTIONS FOR INSTALLATION WHICH MUST BE CAREFULLY FOLLOWED. THE INSTRUCTIONS ARE WORDED IN SUCH A MANNER TO ASSUME THAT THE INSTALLER IS CAPABLE OF COMPLETING THESE TYPE OF ELECTRONIC INSTALLATIONS. IF YOU ARE UNCLEAR AS TO WHAT YOU ARE INSTRUCTED TO DO OR BELIEVE THAT YOU DO NOT UNDERSTAND THE INSTRUCTIONS SO AS TO PROPERLY AND SAFELY COMPLETE THE INSTALLATION YOU SHOULD CONSULT A TECHNICIAN WHO DOES HAVE THIS KNOWLEDGE AND UNDERSTANDING. **FAILURE TO FOLLOW THESE INSTRUCTIONS CAREFULLY AND TO INSTALL THE INTERFACE AS DESCRIBED COULD CAUSE HARM TO THE VEHICLE OR TO SAFETY SYSTEMS ON THE VEHICLE. INTERFERENCE WITH CERTAIN SAFETY SYSTEMS COULD CAUSE HARM TO PERSONS AS WELL. IF YOU HAVE ANY QUESTIONS IN THIS REGARD PLEASE CALL THE HELP LINE OR THE METRA AT 1-800-221-0932 FOR ASSISTANCE.**



MITO-02

BEFORE WIRING UP THE MITO-02

****Important:** Before beginning any of the following, disconnect the negative battery terminal to prevent an accidental short circuit.*

WIRING CONNECTIONS TO BE MADE ON THE VEHICLE SIDE HARNESSES:

1. Connect the **Yellow wire** to the radio's 12 volt battery or memory wire.
2. Connect the **Black wire** to the radios ground wire.
3. Connect the **Orange wire** to the radios Illumination wire. If the radio does not have an Illumination wire just tape up the wire.
4. Connect the **Blue wire** to the radios power antenna turn on wire.

WIRING CONNECTIONS TO BE MADE ON THE 14 PIN HARNESS WITH RCA'S

1. Connect the **Blue/White wire** to the radios amplifier turn on wire.
2. Connect the **Red wire** to the radio's 12 volt accessory wire.
3. Connect the **Brown wire** to the radios mute wire. If the radio does not have a Mute wire just tape up the wire.
4. Connect the **White RCA** to the radios left front rca output.
5. Connect the **Gray RCA** to the radios right front rca output.
6. Connect the **Green RCA** to the radios left rear rca output.
7. Connect the **Purple RCA** to the radios right rear rca output.

If the radio does not have rca outputs or only 1 pair we recommend the use of the Axxess ALOC648 or ALOC608 line level convertor (sold separately).

The following wires are for radios that have navigation:


- * Connect the **Blue/Pink wire** to the radios VSS or Speed Sense wire.
- * Connect the **Green wire** to the radios Parking Brake wire.
- * Connect the **Green/Purple wire** to the radios Reverse wire.

INSTALLING AND TESTING THE MITO-02

- 1. With all connections completed to the radio, plug the corresponding harnesses into the MITO-02.*
- 2. Cycle the key by turning the ignition on then back off, then back on again to test the radio for proper operation.*
- 3. If the subwoofer or main speakers are too loud you can adjust the output by following the steps below:*
 - A. Locate the end of the MITO-02 with the 14 way Molex connector .*
 - B. There are 2 potentiometers next to the Molex connector, the one closest to the Molex connector is the subwoofer control and the other one is the Mid/High speaker control.*



- C. Using a small blade screwdriver turn the potentiometer of the speaker you want to adjust either clockwise to make it louder or counterclockwise to lower the volume.*

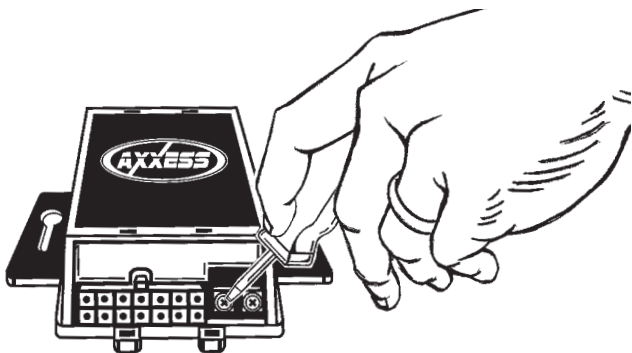

MITO-02



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.

Rev. 02/09/09

INSTMITO-02



1-800-221-0932



www.axxessinterface.com

©Copyright 2009 Metra Electronics Corporation