



INSTALLATION INSTRUCTIONS

PART #:39-3350/3355


TAIL LIGHT GUARD FOR FORD ESCAPE 01-05

COMPONENTS

- 2 Taillight guards (driver side & Passenger side)**
- 3 M4 Hex Head Nut**

INSTALLATION

1. Before you start installing the taillight guards make sure you have all the components listed above.
2. Install the driver side taillight guard first. Refer to Figure 1 to identify the driver side taillight guard.
3. Open the rear lift-gate to expose the taillight mounting screws.
4. Remove the mounting screws and pull out the taillight housings just enough to hook the support bracket of the taillight guard to the edge of the taillight housing.
5. Align the side bracket to the mounting holes on the taillight housing and fasten the assembly using the same factory screws that were removed.
6. Finally check for liftgate clearance. If the taillight guard rubs against the liftgate slightly bend the brackets as needed.
7. Repeat the same procedure to install the passenger side taillight guard

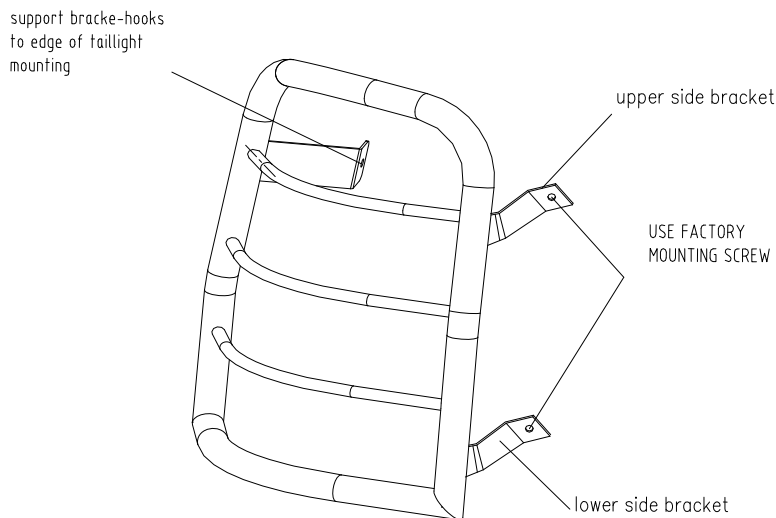

Thank You for choosing Westin products
For additional installation assistance please
call



Westin Automotive Products, Inc.
5200 N. Irwindale Ave. Suite 220
Irwindale, Ca. 91706

Customer service (800) 345-8476 or (626) 960-6762

RevisionA.. 10/20/07